



1GN WALLIGLU WALL MOUNT REFRIGERATED CABINET 1 DOOR WITH WALL MOUNT BRACKETS, LED LIGHTING

Capacity. 112LTR

Temperature Range. +2°C to +5°C @ +43°C

Adjustable Humidity. 60% to 90% (Adjustable in 1% increments)

#### Main Features

**Extended Warranty** – 5/2yrs Parts and Labour

**High-Performance** – 55mm high-density (45kg/m<sup>3</sup>) rigid foam polyurethane insulation, Zero Ozone Depleting – (100% CFC & HCFC Free)

**+43°C Ambient (T Class)** – all cooling, mechanical components are engineered to perform reliably in a tropicalized climate of +43°C ambient

**Adaptive Precision Controller** – adaptive and remarkably flexible IP65 Water & Dust Ingress Protected 'Intelligent' controller with (LCD) Liquid Crystal Display for clear text monitoring of temperatures, functions, cycles, alarms, compressor running, defrost cycle, dripping indicator, temperature & humidity level indicator, cooling, door open alarm, and clean condenser. Built-in features include; audible and visual multi-function alarm alert system, fan speed management system, auto self-diagnostics system, and Intelligent Defrost System

**Intelligent Defrost Systems (IDS)** – demand responsive, reliable and highly-efficient 'hot-gas' defrost eliminating the need for extra energy input will only initiate when necessary & only when necessary without consideration of previous defrost cycles and without the need for predetermined time-based defrost intervals

**AISI304 Construction** – entirely constructed of AISI304 high-grade-food-safe stainless steel externally and internally featuring a mirror polished interior with a coved ceiling and floor base and radius corners (R=12) both top and bottom. Easy 'tool free' removable shelving system for cleaning is in AISI304 stainless

**High-efficiency Refrigeration Systems** – top-side mounted side mounted high-performance electronic controlled integral refrigeration system, entirely front ventilating refrigeration and electrics, condenser & evaporator/s with high exchange surface area for maximum output of refrigeration cycles, entire refrigeration system mounted on 'slide-out' guides to facilitate ease of maintenance and service

**Adjustable Humidity Control** – adjustable humidity level from between 60% - 90% in increments of 1% via the controller allowing an ideal level of humidity for any food type being stored

**High Exchange Evaporators / 'IQ' Cooling Fans** – protected by food safe coating and AISI304 stainless steel shroud are positioned within the dead space rear of the door mullion/s for highly efficient cooling and perfect homogeneity

**Solid Panel Doors** – reversible AISI304 insulated stainless panel door with radius handle, self-closing at less than 90° with 'stop' (remains open unassisted) at 95°

**Entirely Front Breathing** – entirely front ventilating system to allow for installation hard-up against the rear, left side technical compartment side walls and ceiling

**Door Frame Heater** – to eliminate condensation on and around the door fascia

**Auto Self-diagnostics** – is self-adjusting to ambient and operational conditions, continually accesses the performance of the refrigeration system and efficiency

**Inbuilt Defrost Waste Vaporizer** – hot-gas disposal device to eliminate the defrost water (drainage not required)

**Over-current / Thermal Fuse Protection** – inbuilt thermal protection in the event of a thermal compromise to prevent, and limit damage to equipment's electrical components and reduce the risk of harm to the operator caused by overloads, or electrical safety breaches in unusual circumstances

**Service & Maintenance** – facilitated via electronic controller to report a precise log of operating temperatures, cycles & alarm event history available in real time to service technicians, self-diagnostic test can be launched to ensure parameters are correct set to guarantee optimum operating capacity upon servicing/maintenance

<b>Manufacturer Warranty.</b>	5 Years Parts & 2 Years Labour
<b>Temperature Range.</b>	+2°C to +5°C
<b>Rated Ambient Class.</b>	+43°C (T Class)
<b>Internal Capacity.</b>	112LTR
<b>Origin.</b>	Italy

**Model** PR.1VH

#### Electrical Specification

Supply voltage / Frequency.	240V / 50Hz / 1Ph
Connection rating.	2.0Amps
Connected load.	480Watts - 0,48kW

#### Key Information: Integral Versions (R404a)

Internal volume.	112 litres
Number door/s.	1
Type of door. (stainless steel)	Insulated panel
Door hinged.	Right hand side
Drainage.	Not required
Minimum temperature set point.	+2°C
Maximum temperature set point.	+5°C
Ambient class.	+43°C (T Class)
Adjustable humidity (adjustable in 1% increments).	60% to 90%
External dimensions, Width.	805mm
External dimensions, Depth.	450mm
External dimensions, Height.	940mm
Door width x height. (mm)	635Wx648D
Overall depth with Door/s open.	1070mm
Insulation thickness.	50mm
Insulation density.	45kg/m <sup>3</sup>
Number of Shelves & Shelf Size. (mm)	(2) x 325Wx530D
Type of external material.	AISI304 Cr Ni 18/10
Type of internal material.	AISI304 Cr Ni 18/10
100% entirely front breathing.	Yes

#### Refrigeration Data (R404a)

Controller type.	Electronic
Refrigerant type.	R404a
Refrigerant Gas Quantity.	320grams
Compressor power.	3/4hp
Cooling Capacity @ +43°C.	460Watts
Cooling Capacity @ +32°C.	560Watts
Evaporator Temp.	-10°C
Cooling system type.	Ventilated Forced Air
Defrost type.	IDS
Defrost waste disposal.	Auto-disposal
Net / Shipped Weight.	56kg / 66kg

#### Marks of Conformity

HACCP Certified, 2006/42/CE, NF, EN 60335-1, EN 60335-2-89, EN 55014-1, EN55014-2, EN 61000-3-2, EN 61000-3-3, 2004/108/CE, RoHS, RAEE, WEEE, REACH

#### Included Accessories

Number of shelves included.	2
Wall mount brackets.	Included
LED internal lighting.	Included

#### Versions Available

Remote. (without inbuilt refrigeration unit)	PRR.1VH
Double Glazed Argon E Tempered Safety Glass	PR.1PVH
Low-temperature. (Freezer) Version	PR.1VH
Remote Freezer	PCR.1VH
Triple Glazed Argon E Heated Tempered Safety Glass Door	PC.1PVH

Wall Mount Refrigerated 112LTR


Optional Accessories	
KWS	Mechanical Key Lock/s (per door)
KSC.M	Electronic Door/s Locks (password protected)
NEON	Neon Lighting
CG.9	AISI304 Stainless Steel Hanging Rail with 9 Hooks
KNI.1	Task Light (mounted on underside over bench top)
RGI.G	Stainless Steel Shelf
RGIG.G	Rilsan Shelf
RBF	Perforated Flat AISI304 Stainless Shelf
CGG.P	AISI304 stainless 'L' shaped shelf guides (pair)
TSB.10	Bearing Structure for Bench Top Mounting
KSC.M	Electronic Door/s Locks (password protected)
PVBT	Triple Glazed Argon E Heated Tempered Safety Glass Door/s
R404a	R404a refrigerant gas
CO2	Transcritical (for remote counters only)

**Remote Counter Data & Notes**

**Refrigeration Duty:** 280Watts @ -150°C (minimum power required/suggested)


**Remote Connections:**  
 B - Exit tube evaporator (suction tube) Ø 8mm  
 C - Entry tube evaporator (liquid line) Ø 6mm  
 D - Power lead 10Amp 3 pin

**No tundish/waste drain required - auto disposal device fitted as standard**

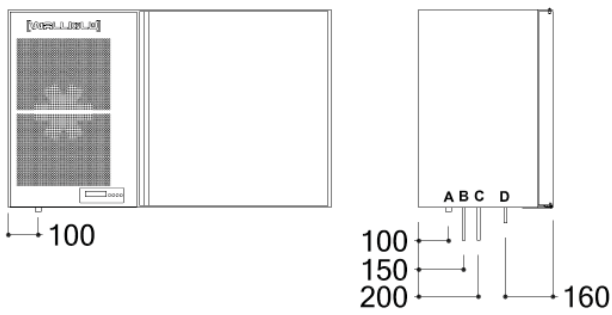


**SERVICES LAYOUT**

END VIEW

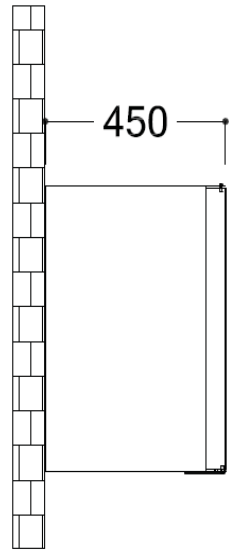

TOP VIEW

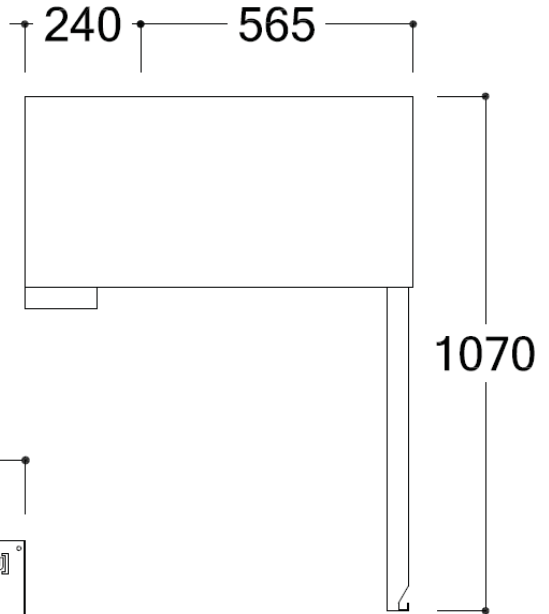

FRONT VIEW

